
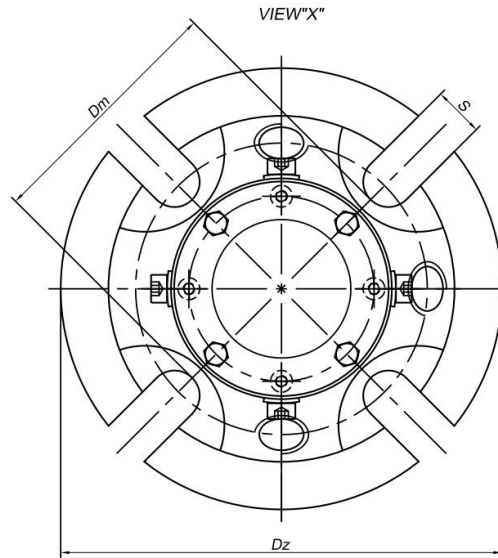


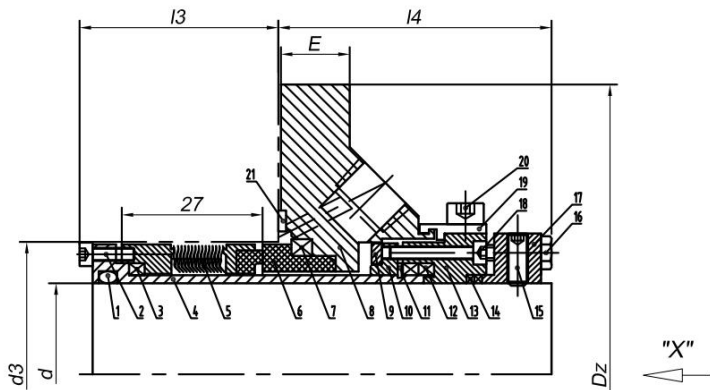

- 1 O-Ring
- 2 HSH cap screw
- 3 Graphite
- 4 Sleeve
- 5 Bellows
- 6 Stationary ring
- 7 Graphite
- 8 Gland
- 9 Copper gasket
- 10 Throttle
- 11 Snap ring
- 12 Graphite
- 13 Retaining ring
- 14 Graphite
- 15 Set screw
- 16 Hexagon head bolt
- 17 Drive ring
- 18 HSH cap screw
- 19 Fixture
- 20 HSH cap screw
- 21 Graphite+SS316

d	Dz	Dm	d3 Min	d3 Max	S	I3	I4	E
24	104.8	49.2	41	49	12	38.1	52.3	13.2
25	104.8	49.2	41	49	12	38.1	52.3	13.2
28	108	47	44	52.3	12	38.1	52.3	13.2
30	111	49	46	55.5	12	38.1	52.3	13.2
32	111	51	48	55.5	12	38.1	52.3	13.2
33	111	51	49	55.5	12	38.1	52.3	13.2
35	111	54	51	57.5	12	38.1	52.3	13.2
38	127	57	57.2	60.3	12	41.3	52.3	16.4
40	127	59	58	60.4	12	41.3	52.3	16.4
43	127	61.5	61	63.5	12	41.3	52.3	16.4
45	139.7	64	63.5	69.9	12	41.3	52.3	16.4
48	139.7	67	66.7	73	12	41.3	52.3	16.4
50	139.7	69	68	73	12	41.3	52.3	16.4
53	152.4	73	71	76.2	12	44.5	52.3	16.4
55	152.4	74	74	79.4	12	44.5	52.3	16.4
58	165.1	74	76.2	82.5	16	44.5	52.3	16.4
60	165.1	79	79.4	85.7	16	44.5	52.3	16.4
63	177.8	79	85.8	92.1	16	49.2	62	19.6
65	177.8	85.7	88.9	95.3	16	49.2	62	19.6
68	177.8	85.7	92.1	98.4	16	49.2	62	19.6
70	177.8	95	92.1	98.4	16	50.8	62	19.6
75	190.5	101.6	98.5	108	16	50.8	62	19.6
80	190.5	108	101.6	111.1	16	50.8	62	19.6
85	203.2	111.1	108	117.5	20	50.8	62	19.6
90	215.9	117.5	114.3	127	20	50.8	62	19.6
95	215.9	120.7	117.5	130.2	20	50.8	62	19.6
100	228.6	127	123.9	139.7	20	50.8	62	19.6

d	Dz	Dm	d3 Min	d3 Max	S	I3	I4	E
1	4.125	2.125	1.625	1.937	0.5	1.5	2.062	0.519
1.125	4.25	2.25	1.75	2.062	0.5	1.5	2.062	0.519
1.25	4.373	2.375	1.875	2.187	0.5	1.5	2.062	0.519
1.375	4.373	2.5	2	2.25	0.5	1.5	2.062	0.519
1.5	5	2.812	2.25	2.375	0.5	1.625	2.062	0.644
1.625	5	2.812	2.375	2.5	0.5	1.625	2.062	0.644
1.75	5.5	3.187	2.5	2.75	0.5	1.625	2.062	0.644
1.875	5.5	3.187	2.625	2.875	0.5	1.625	2.062	0.644
2	6	3.562	2.75	3	0.5	1.75	2.062	0.519
2-AC	5.25	3.45	2.75	3	0.5	1.75	2.062	0.644
2.125	6	3.562	2.875	3.125	0.5	1.75	2.062	0.644
2.25	6.5	3.812	3	3.25	0.625	1.75	2.062	0.644
2.375	6.5	3.812	3.125	3.375	0.625	1.75	2.062	0.644
2.5	7	4.312	3.375	3.625	0.625	1.937	2.437	0.769
2.625	7	4.312	3.5	3.75	0.625	1.937	2.437	0.769
2.75	7	4.312	3.625	3.875	0.625	1.937	2.437	0.769
2.875	7.5	4.937	3.75	4.125	0.625	1.937	2.437	0.769
3	7.5	4.937	3.875	4.25	0.625	2	2.437	0.769
3.125	7.5	4.937	4	4.375	0.625	2	2.437	0.769
3.25	8	5.312	4.125	4.5	0.75	2	2.437	0.769
3.375	8	5.312	4.25	4.625	0.75	2	2.437	0.769
3.5	8	5.312	4.375	4.75	0.75	2	2.437	0.769
3.625	8.5	5.937	4.5	5	0.75	2	2.437	0.769
3.75	8.5	5.937	4.625	5.125	0.75	2	2.437	0.769
3.875	9	6.625	4.875	5.5	0.75	2	2.437	0.769
4	9	6.625	4.875	5.5	0.75	2	2.437	0.769