


E-M3N type, replacement product of Eagle Burgmann M3N type

Temperature: -20~140°C

Speed: 15 m/s

Pressure: 1Mpa

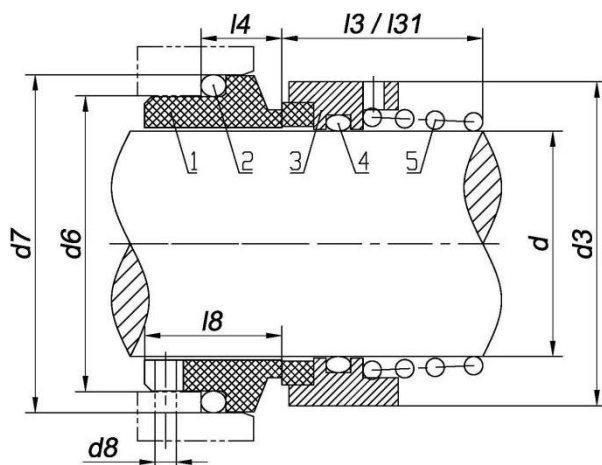

- 1 Stationary ring
- 2 O-ring
- 3 Rotary ring
- 4 O-ring
- 5 Spring

d	d3	d6	d7	d8	l3	l31	l4	l8
10	19	17	21	3	15.5	15.5	10	17.5
12	21	19	23	3	16	15.5	10	17.5
14	23	21	25	3	16.5	15.5	10	17.5
16	26	23	27	3	18	17.5	10	17.5
18	29	27	33	3	19.5	18.5	11.5	19.5
20	31	29	35	3	22	20	11.5	19.5
22	33	31	37	3	21.5	21.5	11.5	19.5
24	35	33	39	3	23.5	23	11.5	19.5
25	36	34	40	3	26.5	24.5	11.5	19.5
28	40	37	43	3	26.5	24.5	11.5	19.5
30	43	39	45	3	26.5	24.5	11.5	19.5
32	46	42	48	3	28.5	28	11.5	19.5
33	47	42	48	3	28.5	—	11.5	19.5
35	49	44	50	3	28.5	28	11.5	19.5
38	53	49	56	4	33.5	31	14	22
40	56	51	58	4	36	34	14	22
43	59	54	61	4	38.5	—	14	22
45	61	56	63	4	39.5	36.5	14	22
48	64	59	66	4	46	42	14	22
50	66	62	70	4	45	43	15	23
53	69	65	73	4	47	—	15	23
55	71	67	75	4	49	47	15	23
58	76	70	78	4	55	50	15	23
60	78	72	80	4	55	51	15	23
63	83	75	83	4	55	—	15	23
65	84	77	85	4	55	52	15	23
68	88	81	90	4	55	53	18	26
70	90	83	92	4	57	54	18	26
75	98	88	97	4	62	55	18	26
80	100	95	105	4	61.8	58	18.2	26.2