


E-HJ92N type, replacement product of Eagle Burgmann HJ92N type

Temperature: -50~+140℃

Speed: 20 m/s

Pressure: 0.08~2.5Mpa

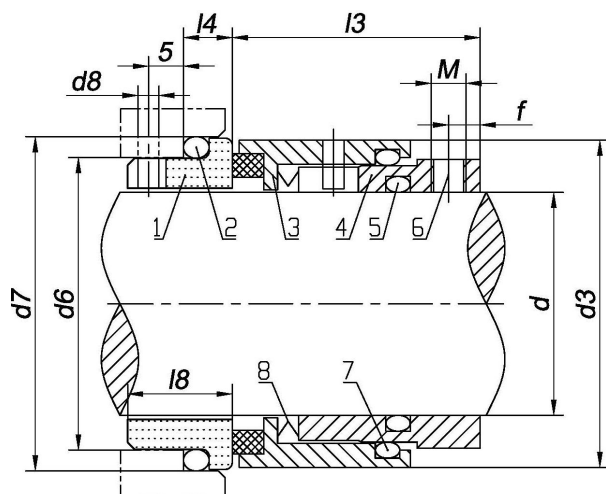

- 1 Stationary ring
- 2 O-ring
- 3 Rotary ring
- 4 Rotary seat
- 5 O-ring
- 6 Set screw
- 7 O-ring
- 8 Wave spring

d	d3	d6	d7	d8	l3	l4	l8	f	M
18	32	27	33	3	30.5	7	15	3	M4
20	34	29	35	3	30.5	7	15	3	M4
22	36	31	37	3	30.5	7	15	3	M4
24	38	33	39	3	33	7	15	3.5	M5
25	39	34	40	3	33	7	15	3.5	M5
28	42	37	43	3	35.5	7	15	3.5	M5
30	44	39	45	3	35.5	7	15	3.5	M5
32	47	42	48	3	35.5	7	15	3.5	M5
33	47	42	48	3	35.5	7	15	3.5	M5
35	49	44	50	3	35.5	7	15	3.5	M5
38	54	49	56	4	37	8	16	4	M5
40	56	51	58	4	37	8	16	4	M5
43	59	54	61	4	37	8	16	4	M5
45	61	56	63	4	37	8	16	4	M5
48	64	59	66	4	37	8	16	4	M5
50	66	62	70	4	38	9.5	17	4.5	M6
53	69	65	73	4	38	9.5	17	4.5	M6
55	71	67	75	4	38	9.5	17	4.5	M6
58	78	70	78	4	42	10.5	18	4.5	M6
60	80	72	80	4	42	10.5	18	4.5	M6
63	83	75	83	4	42	10.5	18	4.5	M6
65	85	77	85	4	42	10.5	18	4.5	M6
68	88	81	90	4	41.5	11	18.5	4.5	M6
70	90	83	92	4	48.5	11.5	19	5	M6
75	99	88	97	4	48.5	11.5	19	5.5	M8
80	104	95	105	4	48.5	11.5	19	5.5	M8
85	109	100	110	4	48.5	11.5	19	5.5	M8
90	114	105	115	4	52	13	20.5	5.5	M8
95	119	110	120	4	52	13	20.5	5.5	M8
100	124	115	125	4	52	13	20.5	5.5	M8